EKOSEP® D-T Series
Sludge Drum Thickener

Suitable for WWTP, industrial field.

Efficient, economical, durable sludge thickener.

Adapt to Centrifuge, belt filter press as pre-dewatering.

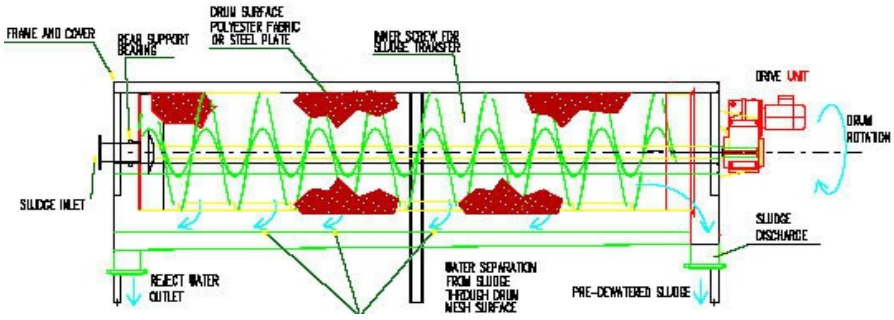

Advantages :

※ Completely covered;
※ High efficiency, capture rate 98%;
※ Low polymer consumption;
※ Stainless steel and macromolecule material, low rotation.
※ Compact construction, need less space;
※ Low energy consumption;
※ High-performance, durable, very few maintenance

TECHNICAL DATA

Type	D-T 800/2000	D-T 800/3000	D-T 1000/2000	D-T 1000/3000	D-T 1000/4000	D-T 1200/4000
Length (mm)	3300	4300	3300	4300	5300	5300
Width (mm)	1100	1100	1300	1300	1300	1500
Height (mm)	1700	1700	1900	1900	1900	2100
Drum Diameter (mm)	800	800	1000	1000	1000	1200
Weight (kg)	700	950	1100	1100	1500	1800
Power (KW)	1.1	1.1	1.1	1.5	2.2	2.2
Capability (m^3/h)	20	30	40	60	80	100

(DS load is varietal in different fields)